
DOSATRON Technology





DOSATRON INTERNATIONAL S.A.S

Rue Pascal - BP 6 - 33370 TRESSES (Bordeaux) - FRANCE Tel. 33 (0)5 57 97 11 11 - Fex. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85

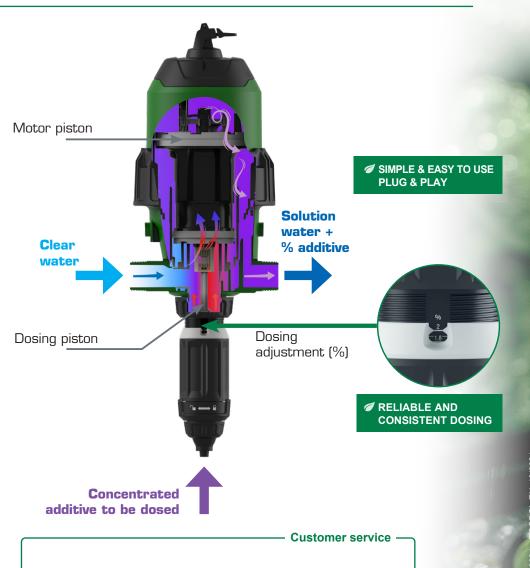

This document does not constitute a contractual obligation and is for information purposes only, DOSATRON INTERNATIONAL reserves the right to modify its devices at any time. Photo credit: @Adobe Stock - Rathmakers. Some images have been generated by Al.



D6GL

AN INNOVATION IN FERTIGATION





- OPTIMUM EFFECTIVENESS OF ADDITIVES
- COMPATIBLE WITH ALL FERTILISERS
- OPTIMISED WATER AND ADDITIVE CONSUMPTION



SIMPLIFIED HYDRAULIC MOTOR


NO METAL PARTS IN THE MOTOR

A REDUCED NUMBER OF PARTS

ECO DESIGNED

Pertironcer ()

PUMP UP the growth!



- Inventory of the physical flows of materials and energy associated with human activities throughout the life cycle of products
- Transparency, reliability, continuous improvement, better environmental performance







Green Line

	D6GL2BPVF
Min/max operating flow range	100 l/h min - 6m³/h max [0.44 US Pint/min (min.) - 26 US gpm (max.)]
Maximum operating temperature	40°C • [104°F]
Min/max operating water pressure	0,3 - 8 bars • [4.3 - 116 psi]
Min/max dosing percentage	0,2% - 2% • 1:500 - 1:50
Suction hose	Ø12x16mm • L 1,75m
Connection	11/4" Male BSPT • Ø33x42mm
Hydraulic motor capacity (two piston clicks)	~ 1 liter • ~ 0.3 US Gallon
Other special features	Inlet injection, internal motor sleeve Manual bypass as standard
Seals	(vF)
Optional	Hydraulic bypass (ref. PJDI175)



Flyer NEW D6.indd 3-4 28/10/2024 13:26

⊕ DOSATRON